

Part Number

05-CL- **BL** - **R** - C - **F** - **C**

BARREL LENGTH **BL**

2 – 7/8" (22.2mm)

3 – 1-1/8" (28.6mm)

ROTATION **R**

90 – 90° Right

180 – 180° Right
(Call for info on Left-hand rotation)

FINISH **F**

SS – Satin Stainless (Standard)


PN – Polished Nickel

SC – Satin Chrome (US26D)




CF – Custom Finish (See Finish Page)

CAM **C**

See CAM Page for options


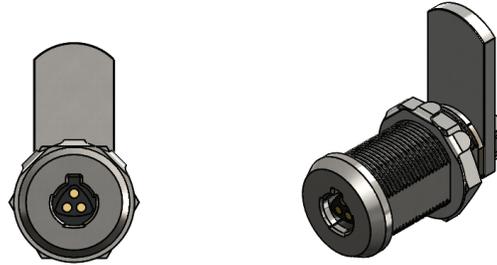


Option 2
Barrel Length
7/8" (22.2)

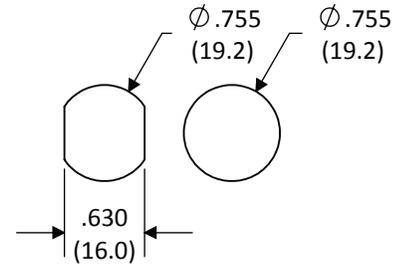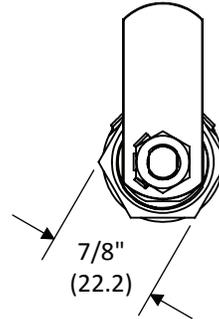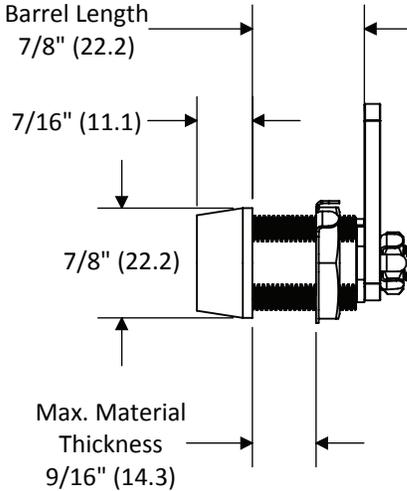

NOTE: If installing into a round hole use a Double-D mounting plate to keep the lock from spinning!

Option 3
Barrel Length
1-1/8" (28.6)

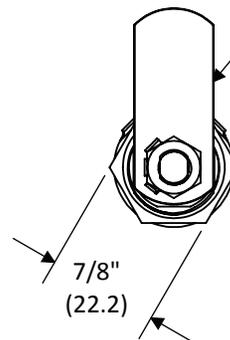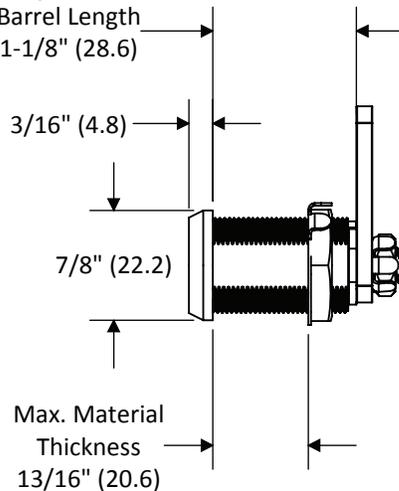


Note when selecting a CAM the threaded tail on this lock has a vertical tenon. Using "V" designation CAM's will allow for the locked at 12 o'clock orientation shown.

Package includes parts for 90° and 180° rotation.

All dimensions are nominal. For best fit call for a sample.
Dual-Dimensions in parentheses are in millimeter (mm).


Straight Flat CAM	
Part #	CAM Length
00-CAM-0750	0.750" (19.1 mm)
00-CAM-1250	1.250" (31.8 mm)
00-CAM-1750	1.750" (44.5mm)
00-CAM-2000	2.000" (50.8 mm)

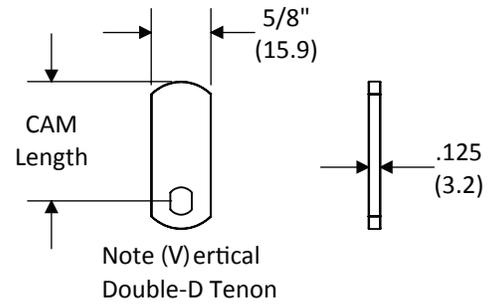

Note (H)orizontal Double-D Tenon

Offset CAM		
Part #	CAM Length	Offset
00-CAM-1250X0313	1.250" (31.8 mm)	0.3125" (7.9 mm)
00-CAM-2000X0313	2.000" (50.8 mm)	0.3125" (7.9 mm)

Note: All CAMs are sold as a set or 2 CAMs containing both Vertical and Horizontal Tenons.

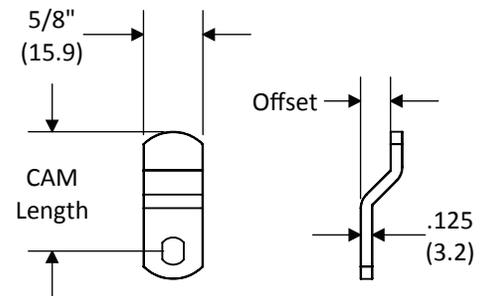

Note (V)ertical Double-D Tenon



Note (H)orizontal Double-D Tenon

**Custom sizes available.
Call for quote and details.**

All dimensions are nominal. For best fit call for a sample.
Dual-Dimensions in parentheses are in millimeter (mm).